



§ SPECIFICATION APPROVAL SHEET §

**Fdt Tech Module No**      **FG080SW00~~X~~-00R**

**Description:**            **8" Digital TFT-LCD Module**

**SPEC No.:**                **SAS-0910008**

**Version:**                 **0.6**

**Issue Date:**            **October 20, 2010**

※ This approval sheet contains 15 pages including the cover and appendix.

**Customer:** \_\_\_\_\_ **APPROVED BY:**

**Date:**        /        / 10

**APPROVED BY:**

**CHECKED BY:**

**DESIGNED BY:**

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_



# FLAT DISPLAY TECHNOLOGY

## 8" GRAPHIC TFT-LCD Module

- FG080SW000-00R
- FG080SW001-00R

### 1. General Description

FDT Smart Graphic TFT Module is a unique TFT LCD module which builds graphic and character inside. It provides user to present customized & full color graphics or characters without any SOC or IPC system. In addition, user can update or upload his graphics or characters via USB port by himself. FDT Smart Graphic TFT Module not only enhances your product values also saves your cost.



#### 1.1 Features

- Single Operation Voltage +12V
- Full Colors Presentation
- UART Interface For Communication
- Easy To Set Up Without SOC Or IPC Controller
- Built In Real Time Clock
- Buzzer Function
- LED Backlight Brightness Control
- Touch Screen Function (Option)
- USB Port For Update Graphic Library

#### 1.2 Application

- Industrial Controller
- Medical Equipment
- Security Equipment
- Simple Function Equipment

**FLAT DISPLAY TECHNOLOGY**

■ FG080SW00x-00R V0.6




## 2. Contents

Contents	Page
<b>1. General Description</b> .....	1
1.1 Features	1
1.2 Applications	1
<b>2. Contents</b> .....	2
<b>3. Block Diagram</b> .....	3
3.1 Block Diagram	3
<b>4. Order Information</b> .....	4
4.1 Unit	4
4.2 Power Cable (Option)	4
<b>5. Specifications</b> .....	5
<b>6. Absolute Maximum Ratings</b> .....	5
6.1 Absolute Maximum Ratings	5
<b>7. Recommended operating conditions</b> .....	6
7.1 Electrical Characteristics	6
<b>8. TFT-LCD Information</b> .....	6
8.1 TFT-LCD Mechanical Specifications	6
8.2 TFT-LCD Optical Characteristics	6
<b>9. Pin Description</b> .....	7
9.1 J107A Assignment of Signal Input (Pitch 2.0mm 7Pin,Side Entry Type)	7
9.2 UART Timing Chart ( Client side )	7
<b>10. 4W Resistance Touch Panel Characteristics</b> .....	8
10.1 Touch Screen Integration Design Guide	8
10.2 Mechanical Performance	8
10.3 Durability Performance	8
<b>11. Buzzer Notice</b> .....	9
11.1 Remove Buzzer Label	9
<b>12.Dimension Information</b> .....	10-13
12.1Unit(FG080SW000-00R)	10
12.2Unit(FG080SW000-00R-2)	11
12.3Unit(FG080SW001-00R)	12
12.4Unit(FG080SW001-00R-2)	13
<b>13. Accessory</b> .....	14
13.1 LACABLE008-FDR (Option)	14

### 3. Block Diagram

#### 3.1 Block Diagram

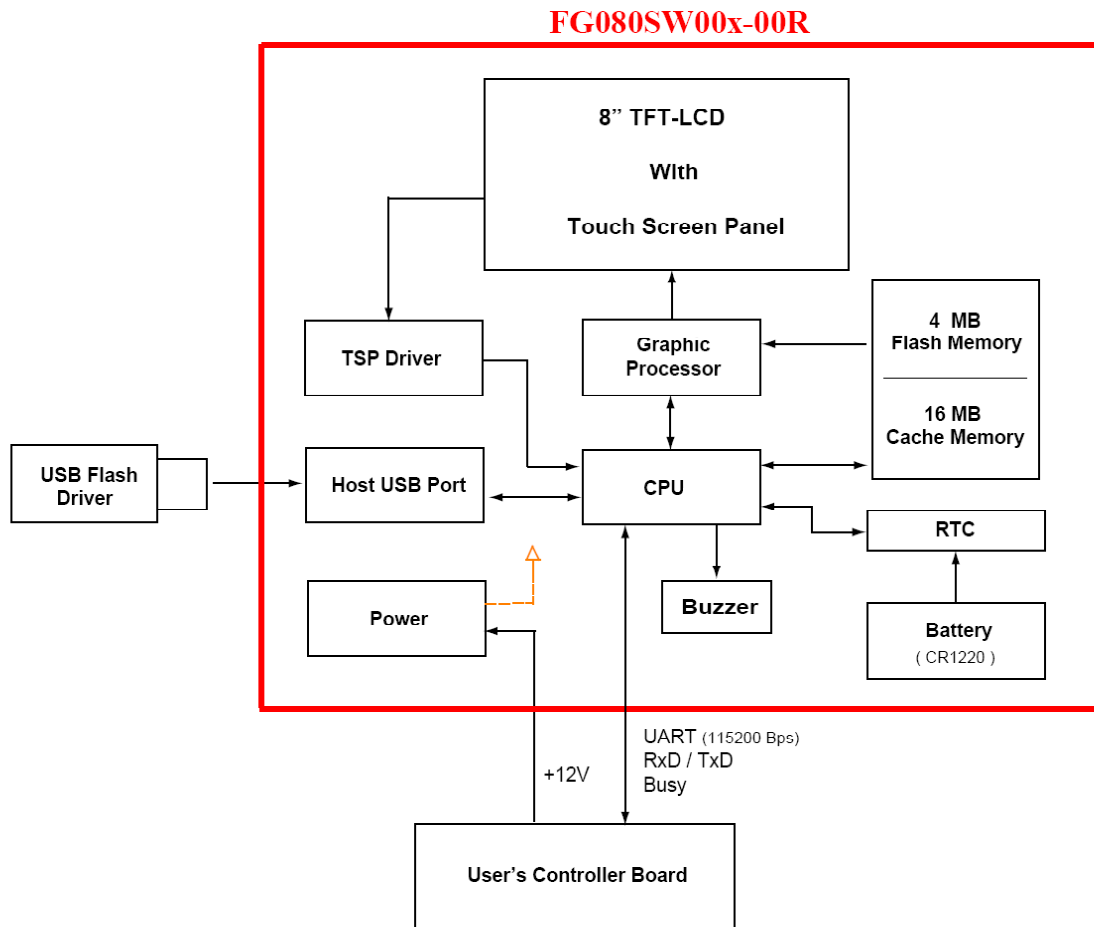


PRELIMINARY



## 4. Order Information

### 4.1 Unit

#### Unit

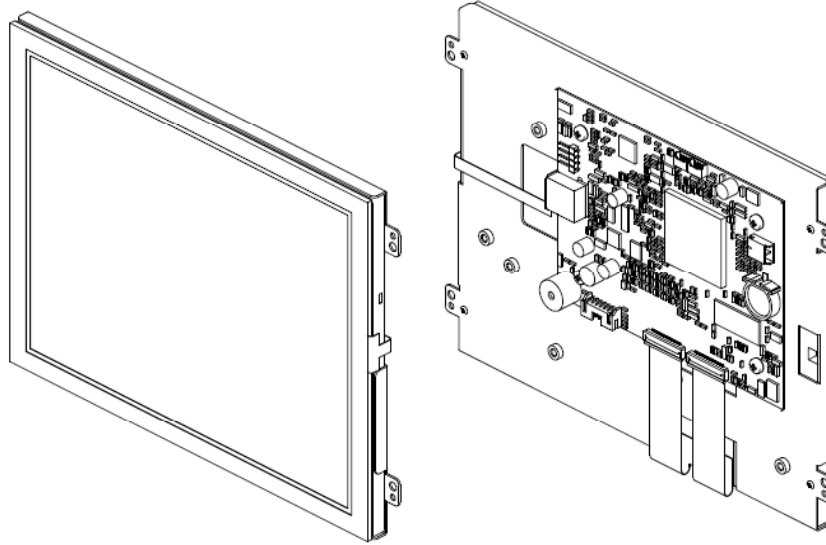

Parameter	FG080SW000-00R	FG080SW001-00R	Unit
RTC	⊙	⊙	
Touch Screen Function	-	4W Resistance	
Buzzer Function	⊙	⊙	

- Note:**
1. The tape in back of the bracket is to avoid the panel falling from the unit in delivery.
  2. It's Just A temporary adhesion.

### 4.2 Power Cable (Option)

#### Power Cable



Order Part Number	Pin Description	Remark
LACABLE008-FDR	7P 2.0mm - 4P1.25mm - 5.5mm-DC Jack	

**FLAT DISPLAY TECHNOLOGY**

■ FG080SW00x-00R V0.6



## 5. Specifications

Parameter	Specifications	Unit	Remark	
Communication Protocol	Duplex Transmission (UART)			
	UART Transmission Rate	115200	Bps	
	Data Bit	8	Bits	
	Parity Bit Check	NO		
	Stop Bit	1	Bit	
USB(TYPE A)	Host	USB 1.1		
Weight	---	g		
Flash ROM	4M	Bytes	Note1	
SDRAM	16M	Bytes		
Picture Format	JPEG Category		Note1	

**NOTE : 1** How many pictures in flash memory depend on picture's compression ratio.

## 6. Absolute Maximum Ratings

### 6.1 Absolute Maximum Ratings

Parameter	Symbol	Min	Max	Unit	Remark
Input Voltage	Vin	+9	+15	V	
Digital Input Signal	TTL	+0.3	+3.6	V	
Operating Temperature Without TSP		-20	+70	°C	
Operating Temperature With TSP		-10	+60	°C	
Storage Temperature Without TSP		-20	+70	°C	
Storage Temperature With TSP		-20	+70	°C	

**FLAT DISPLAY TECHNOLOGY**

■ FG080SW00x-00R V0.6



## 7. Recommended Operating Conditions

### 7.1 Electrical Characteristics

Parameter	Symbol	Min	Typ	Max	Unit	Note
Input Voltage	Vin	+10	+12	+14	V	
Total Current	Iin	-	400	-	mA	@+12V
Power Consumption	-	-	4.8	-	W	@+12V
I/O	TTL	+0.1	-	+3.3	V	

## 8. TFT-LCD Information

### 8.1 TFT-LCD Mechanical Specifications

Parameter	Specifications	Unit
Screen Size	8" (Diagonal)	inch
Display Format	800 x (R.G.B) x 600	dot
Active Area	162(W) x 121.5(H)	mm
Surface Treatment	Anti – Glare + EWV	

### 8.2 TFT-LCD Optical Characteristics

Parameter	Symbol	Condition	Min	Typ	Max	Unit	Remark
Viewing Angle	Horizontal	Left	70	80	---	deg	
		Right	70	80	---	deg	
	Vertical	Top	50	60	---	deg	
		Bottom	60	70	---	deg	
Contrast Ratio	CR	At optimized Viewing angle	800	900	---	---	
Brightness Without TSP	L	$\theta = 0^\circ / \phi = 0$	350	400	---	cd/m <sup>2</sup>	
Brightness With TSP	L	$\theta = 0^\circ / \phi = 0$	280	320	---	cd/m <sup>2</sup>	
LED Life Time	---	T <sub>a</sub> =+25°C	20000	30000	---	Hrs	I <sub>L</sub> =200mA

FLAT DISPLAY TECHNOLOGY

■ FG080SW00x-00R V0.6



## 9. Pin Description


### 9.1 J107A Pin Assignment of Signal Input (Pitch 2.0mm 7Pin, Side Entry Type)

※ Connector Part No.: M24267R (STM) or S7B-PH-K-S (JST); Matching Connector Part No.: P24267 (STM) or PHR-7 (JST)

Pin No	Symbol	I/O	Description	Remark
1	VCC12V	-	+12V Input Voltage	DC
2	VCC12V	-	+12V Input Voltage	DC
3	GND	-	Ground	
4	GND	-	Ground	
5	BUSY	O	Busy status (Internal pull high)	High: Busy Low: Normal (Note1)
6	RXD	I	Receive Data (UART)	TTL Level RS-232 (3.3V)
7	TXD	O	Transmit Data (UART)	TTL Level RS-232 (3.3V)

**Note1:** Your application circuit board must be connects with busy pin of SGM.

### 9.2 UART Timing Chart ( Client side )

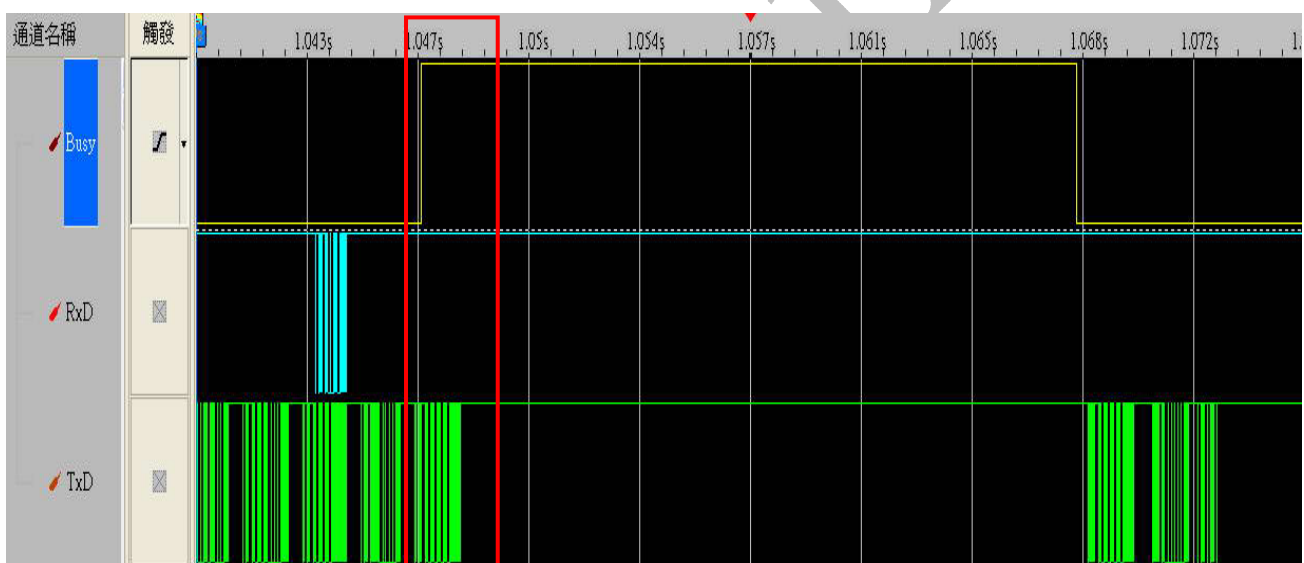

※ If busy signal of SGM appears on the duration of client processor transmission command.  
Please don't worry this situation and goes on last command procedure.




## 10. 4W Resistance Touch Panel Characteristics

### 10.1 Touch Screen Integration Design Guide


Avoid the design that Front-case overlap and press on the active area of the touch-panel.

Give enough gap (over 0.5mm at compressed) between the front case and touch-panel to protect wrong operating.

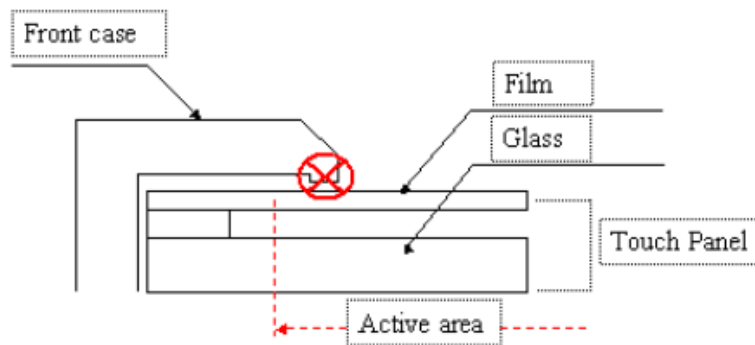

Use a buffer material (Gasket) between the touch-panel and front-case to protect damage and wrong operating.

Avoid the design that buffer material overlap and press on the inside of touch-panel viewing area.

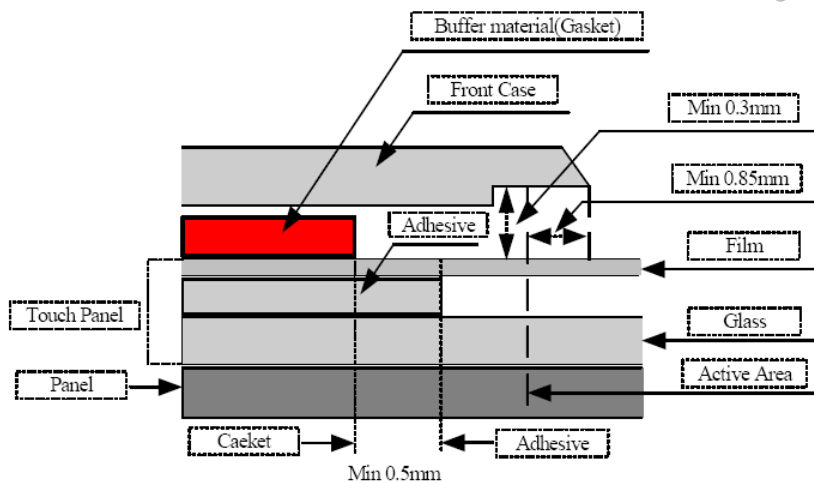

**Note: We strongly suggest to follow above design guide to avoid the linear defect happened on the touch panel.**

### 10.2 Mechanical Performance

Parameter	Specifications
Input Method	Finger or stylus pen
Operating Force	Max: 50gf
Surface Hardness	3H or more

### 10.3 Durability Performance

Parameter	Specifications
Hitting Durability	$\geq 1000000$ times, with R8.0 mm silicon rubber, 200g, 5Hz
Sliding Durability	$\geq 100000$ times, with R0.8 mm polyacetal stylus, 250g, 60 mm / sec

FLAT DISPLAY TECHNOLOGY

■ FG080SW00x-00R V0.6



## 11. Buzzer Notice

### 11.1 Remove Buzzer Label




Remove

Preliminary



# 12. Dimension Information

## 12.1 Unit (FG080SW000-00R)

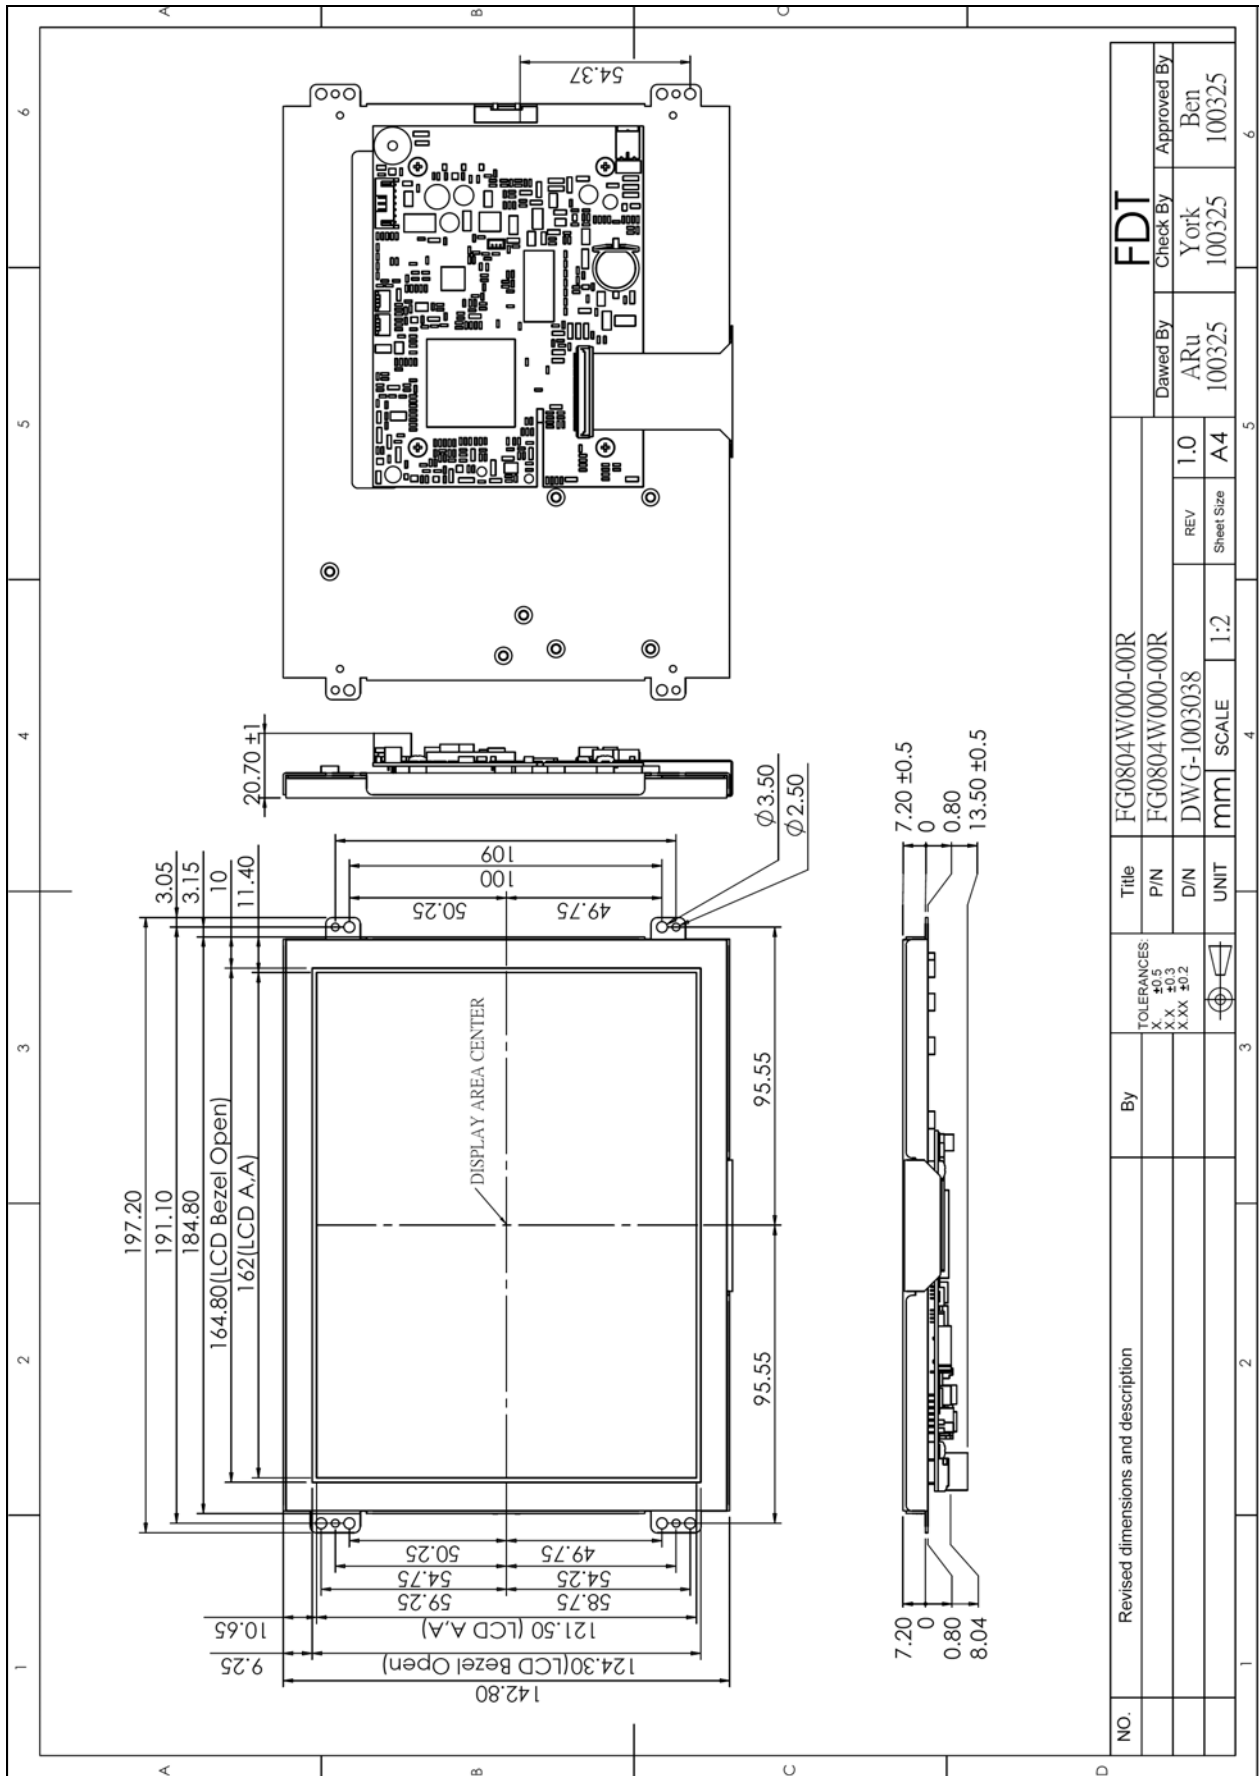


NO.	Revised dimensions and description	By	Title	FDT		
				DWG-1003038	100325	
			P/N	FG0804W000-00R	Check By	Yorik Ben
			D/N	DWG-1003038	Drawn By	ARu
			UNIT	mm	REV	1.0
			SCALE	1:2	Sheet Size	A4
					Approved By	Ben
						100325
						100325

FLAT DISPLAY TECHNOLOGY

FG080SW000-00R V0.6

**12.2 Unit (FG080SW000-00R-2)**

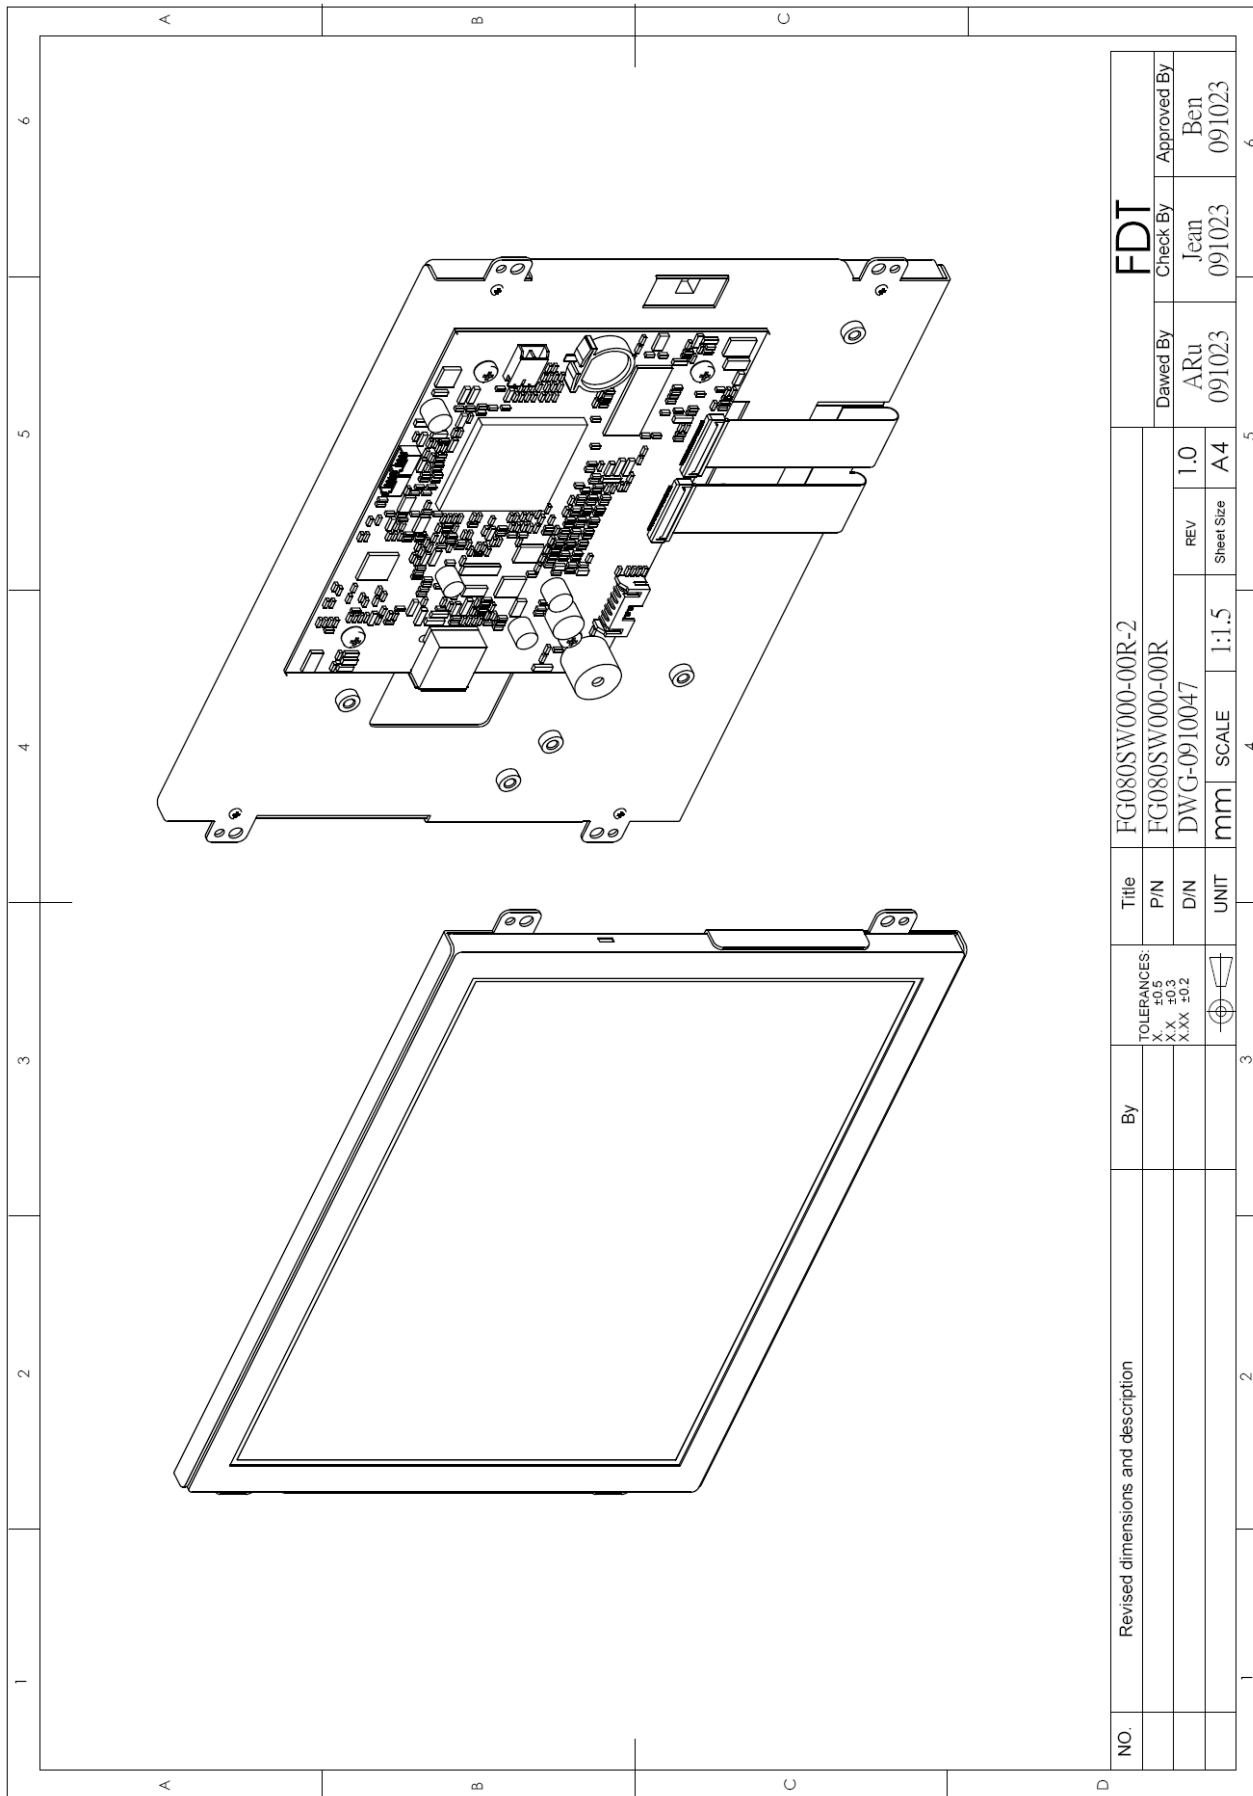


NO.	Revised dimensions and description	By	TOLERANCES: X.X ±0.3 X.XX ±0.2	UNIT	mm	SCALE	1:1.5	REV	1.0	DRAWN BY	ARu	CHECK BY	Jean	APPROVED BY	Ben
											091023		091023		091023
										<b>FDT</b>					
										Title FG080SW000-00R-2					
										P/N FG080SW000-00R					
										D/W/G-0910047					
										Sheet Size A4					

**FLAT DISPLAY TECHNOLOGY**

■ FG080SW00x-00R V0.6



12.3 Unit (FG080SW001-00R)

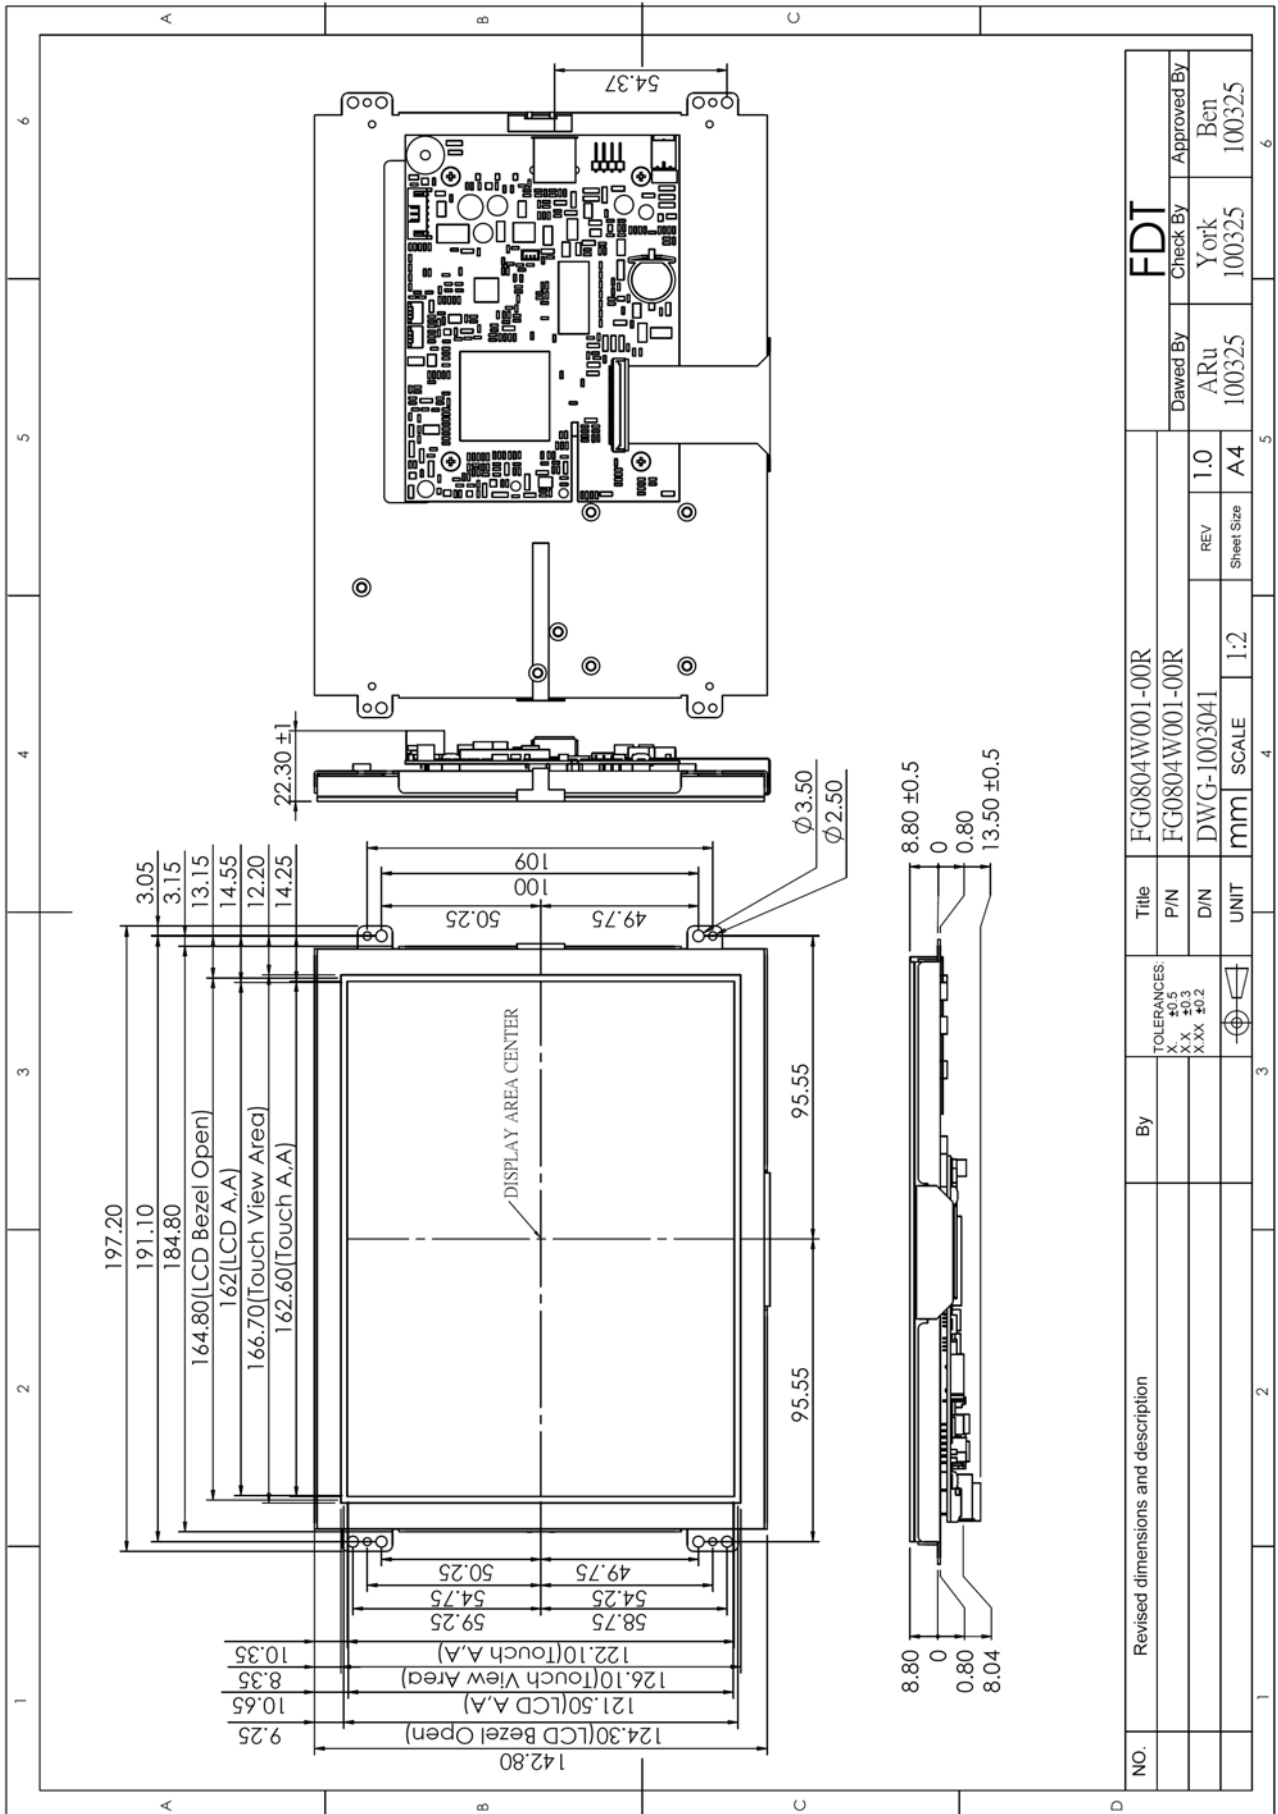


FLAT DISPLAY TECHNOLOGY

NO.	Revised dimensions and description	By	TOLERANCES: X.X ±0.5 X.X ±0.3 X.XX ±0.2	Title	FG0804W001-00R	Drawn By	ARu	Check By	York	Approved By	Ben
				P/N	FG0804W001-00R						
				D/N	DWG-1003041	REV	1.0		100325	100325	100325
				UNIT	mm	SCALE	1:2	Sheet Size	A4		

FDT



**12.4 Unit (FG080SW001-00R-2)**

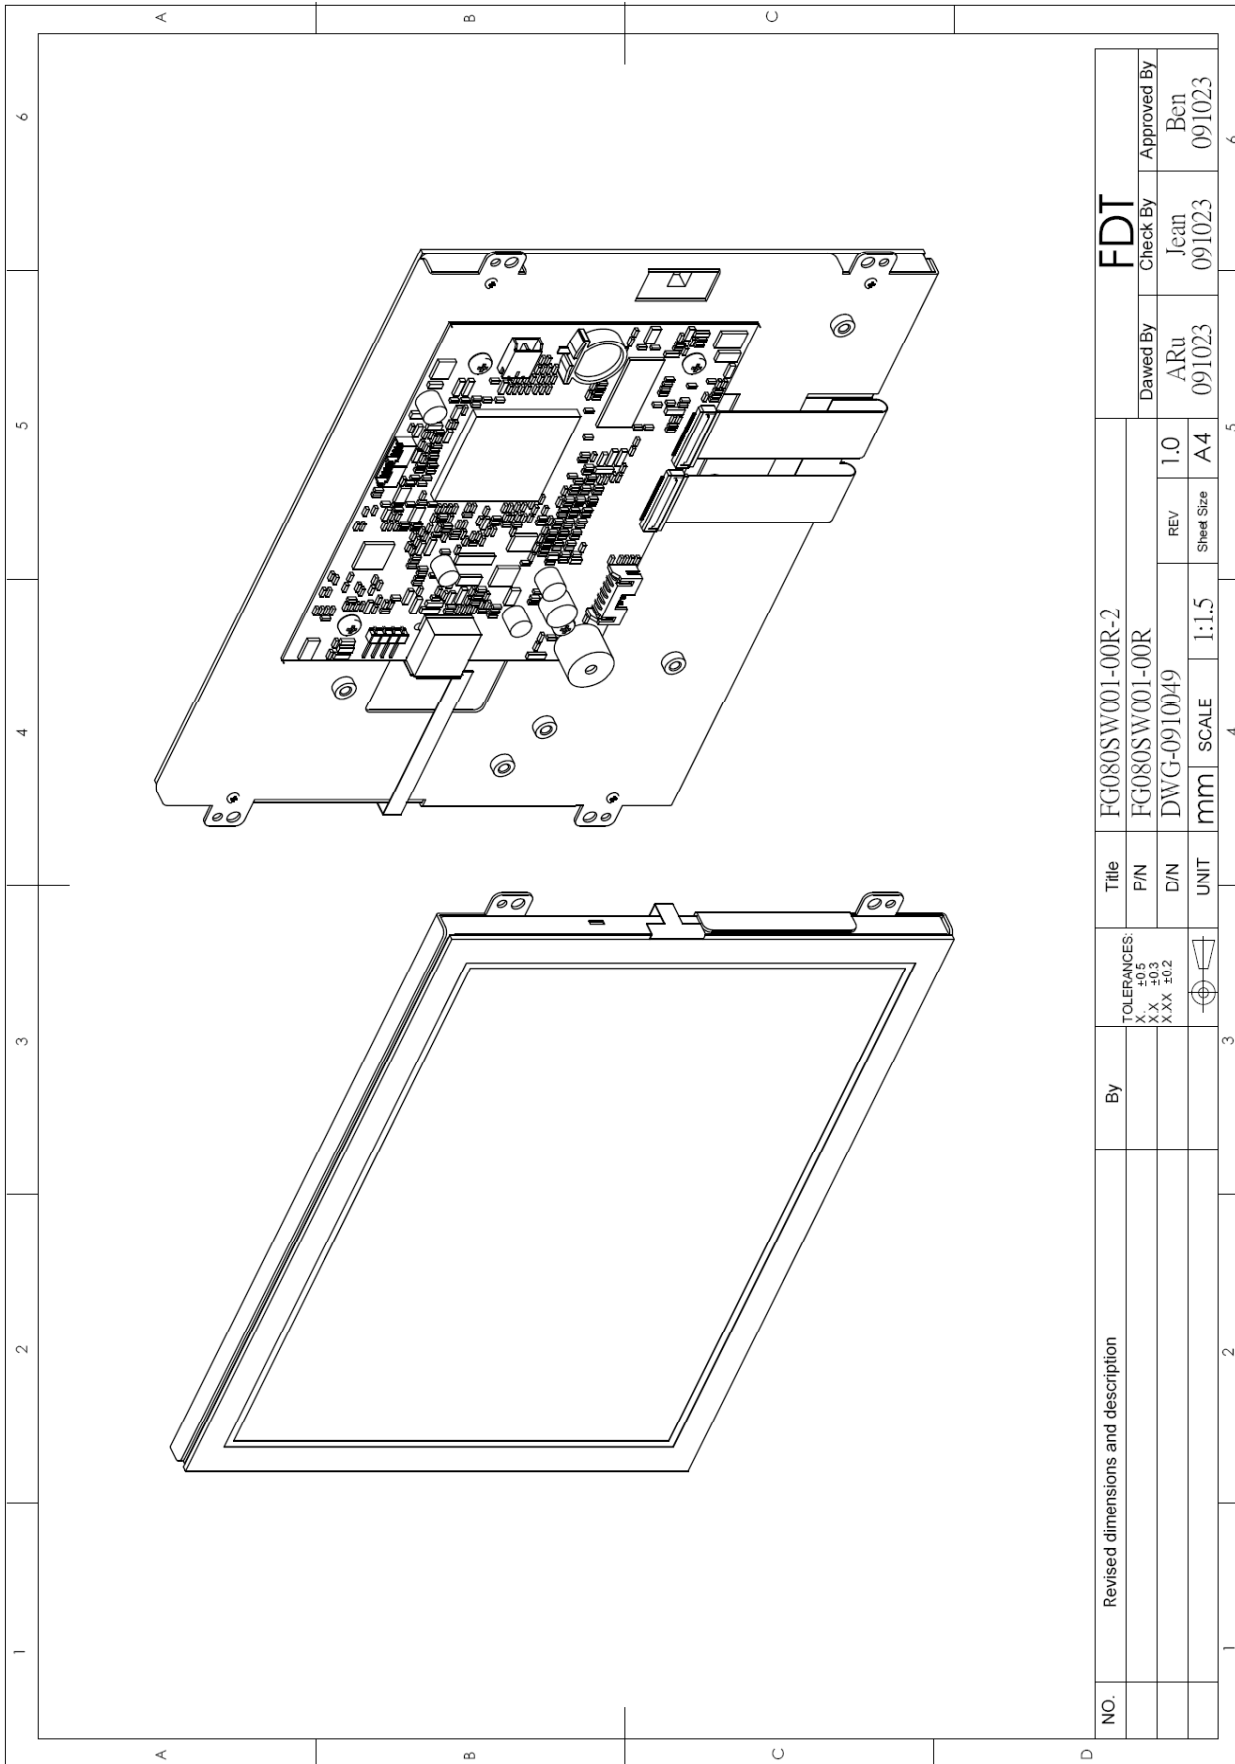

**FLAT DISPLAY TECHNOLOGY**

■ FG080SW00x-00R V0.6



